

Product Specifications



WD240

Industrial IoT Terminal

Digital Input
Acquisition

Analog Input
Acquisition

4G/Wi-Fi
Cloud Connectivity

I/O Data Acquisition
and Control

Product Overview

The WD240 Series Industrial IoT Terminal is a DIN rail-mounted industrial intelligent terminal designed for Modbus, CJ/T188, I/O data acquisition, and 4G cloud data transmission. It supports 4G/WiFi cloud connectivity, multi-channel I/O data acquisition, and Modbus RTU master/slave communication.

The terminal supports multiple configurable I/O combinations, including analog inputs (AI), analog outputs (AO), digital inputs (DI), and digital outputs (DO). Various configurations are available, such as 8AI + 4DI + 4RO, 4AI + 8DI + 4RO, 4AI + 4DI + 4DO + 4RO, and 2AO + 6AI + 4DI + 4RO.

The data acquisition function supports reading data from devices using Modbus RTU and CJ/T188 protocols via wired RS232/RS485 serial interfaces. It also supports wireless 4G/WiFi data transmission to cloud platforms.

Designed with an industrial-grade architecture, the WD240 Series provides high stability, reliability, and flexible expandability, making it ideal for data acquisition in complex industrial environments and wide-area 4G cloud communication applications.

It is widely used in industries such as mining, oil fields, water conservancy monitoring, smart agriculture, intelligent transportation, smart factories, industrial control, building automation, healthcare, and hospitality.



Product features

- ✓ **Rich I/O Acquisition Interfaces:** Features 4-channel 12-bit analog inputs (AI), 4-channel digital inputs (DI, supporting dry/wet contacts, 0–60 V input, with counter function), and 4-channel 3 A relay outputs (AC/DC). It also supports multiplexed I/O configuration, allowing up to 8 channels of AI/DI/DO.
- ✓ **Cloud Data Transmission:** Supports uploading serial port and I/O data to various cloud platforms and systems via the 4G network using the MQTT protocol.
- ✓ **Wireless Transparent Transmission:** Provides wireless transparent transmission for

RS232/RS485 interfaces, supporting point-to-point and point-to-multipoint communication. It features interference-free coexistence and optimized data buffering capabilities.

- ✓ **Industrial-Grade Design:** Features a wide voltage input range of 5–35V and a wide operating temperature range of -40 to +85°C. Interfaces are equipped with isolation and 15kV ESD protection, while software and hardware watchdogs enable automatic recovery from abnormal conditions.

Application scenarios



Smart Factory



Intelligent Equipment



Energy Management



Smart City



Water Conservancy &
Water Supply



Environmental
Monitoring



Smart Agriculture



Mining & Oilfield



Building Monitoring



Medical Industry




Hotel & Commercial
Business




Intelligent
Transportation

Typical topology

- Serial Port/I/O Data Communication: Enables communication between serial port/I/O data and upper-level systems or cloud platforms through 4G or WiFi transparent transmission.

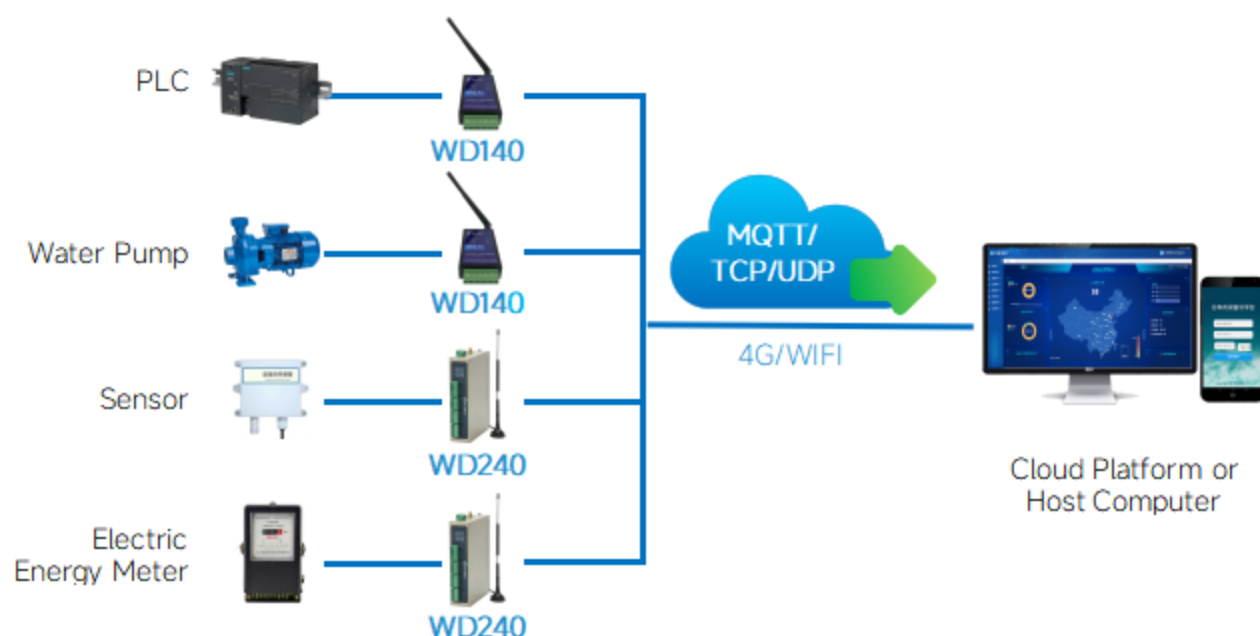

- Serial Port/I/O Data Communication: Enables interaction between serial port/I/O data and cloud-based data platforms and software systems via MQTT/TCP protocols over 4G and WiFi communication networks.

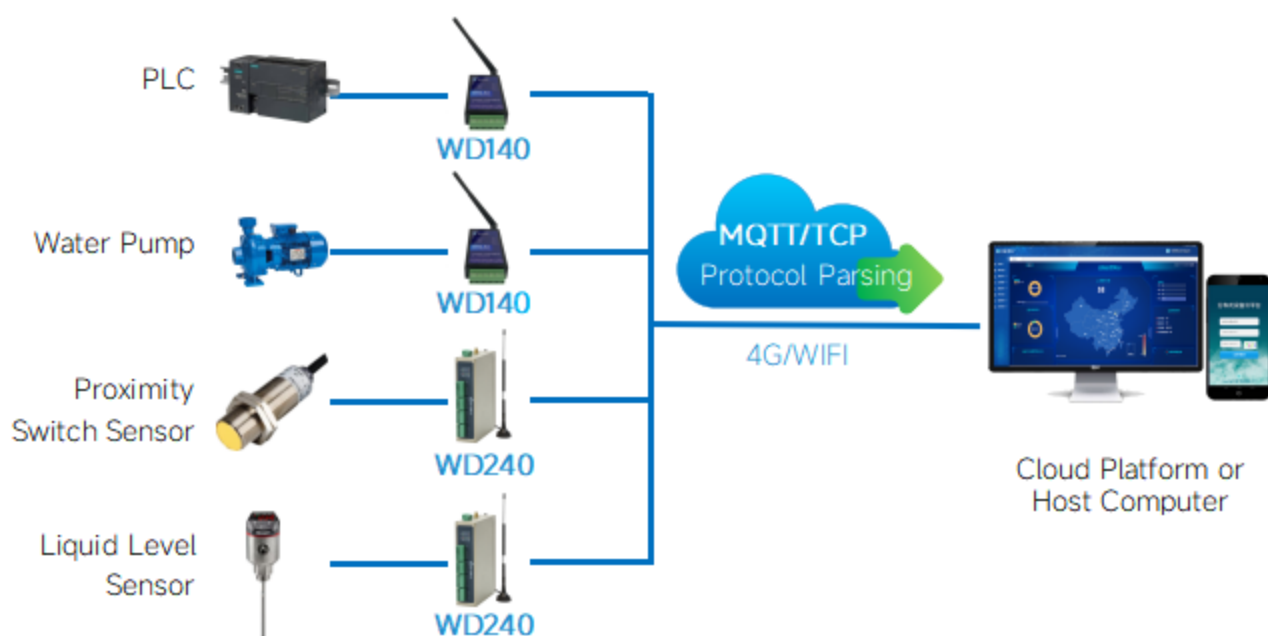

Product specifications

Hardware Parameters

Hardware platform

CPU Core	32-bit Arm Cortex-M4
----------	----------------------

Interface specifications

Power socket	DC 9V-35V (terminal block)
Serial port	1*RS232/RS485 Serial Port, with 15 kV ESD protection, supports baud rates from 1200 to 128000 bit/s, with a default baud rate of 19200 bit/s
Analog Input	4/8-channel 12-bit Analog Inputs (AI) with selectable current or voltage input types. Current Input: 4-20 mA, 0-20 mA Voltage Input: 0-5 V, 0-10 V, etc.
Digital Input	4/8-channel optically isolated 0-60 V digital inputs, supporting dry and wet contact inputs (dry contact by default, with support for 4-channel counter functionality)
Digital Output	4-channel 3 A relay outputs, rated for 250 VAC or 30 VDC, with optional expansion to 4-channel transistor digital outputs (DO)
Antenna connector	SMA x 1
Terminal Block	3*6*3.81mm, 1*3*3.81mm, 1*5*3.81mm
4G Network Standard (Optional)	LTE Cat1 ,Maximum downlink speed 10Mbps , Maximum uplink speed 5Mbps
WiFi Standard (Optional)	Supports IEEE 802.11b/g/n

Mechanical properties

Dimensions	136x106.5x35mm
Installation method	Rail-mounted
Equipment housing	Metal casing
Protection rating	IP30
Heat dissipation	Fanless heat dissipation
Weight	280g

Equipment operating environment

Ambient humidity	5% ~ 95% (Non-condensing)
Storage temperature	-40 °C~ 85°C
Operating temperature	-40 °C~ 85°C


EMC Standards

Electrostatic discharge immunity	GB/T17626.2-2018,level4
Electrical Fast Transient Pulse Immunity	GB/T17626.4-2018,level4
Oscillating magnetic field Immunity to interference	GB/T17626.18-2016,level4
Radio-frequency electromagnetic fields Radiated immunity	GB/T17626.3-2016,level4
Surge (transient) Immunity	GB/T17626.5-2019,level4
Power-frequency magnetic field Immunity	GB/T17626.8-2006,level4

Physical properties

Vibration	GB/T2423.10-2008
Impact	GB/T2423.5-2019
Fall	GB/T2423.8-1995

Product dimensions

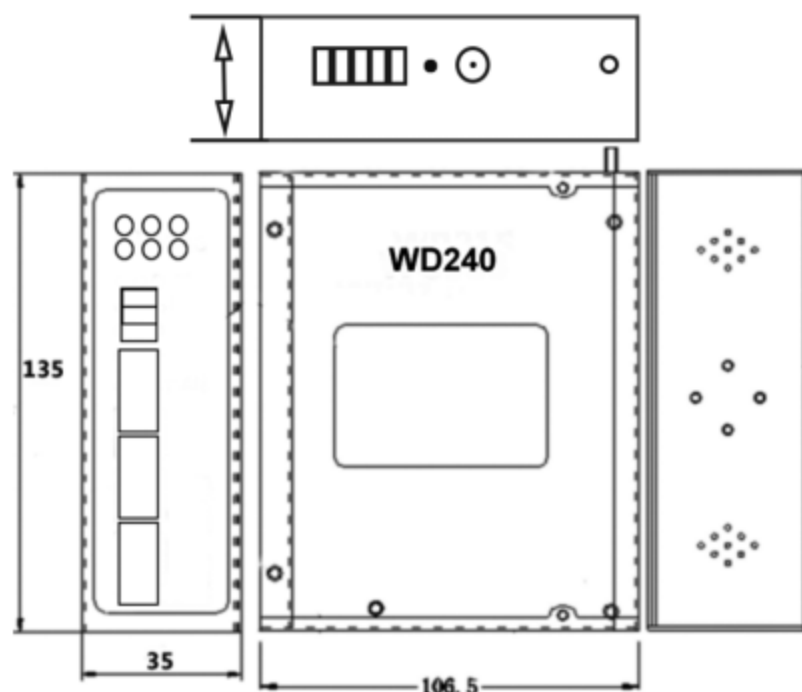

Order details

Hardware Selection

Order number	WD240-<N>-<I>-<S>
N (Uplink Network)	G (With 4G Cat 1 Module) W (With WiFi Module)
I (I/O Module)	M0844 (M indicates the module configuration, where 0 represents 0 analog outputs (AO), 8 represents 8 analog inputs (AI) (4 dedicated AI + 4 multiplexed AI), 4 represents 4 digital inputs (DI), and 4 represents 4 relay outputs (RO))
S (Serial Port Type)	-232:RS232; -485:RS485
Example	WD240-GM0844-485 (8AI-4DI-4DO, 4G CAT1,485)

*This table is for reference only. The exact model selection shall be determined by the engineering team

For further information, please visit the WideIoT website: <https://www.wideiot.com>.

Alternatively, please contact us via the following methods:

Email: info@wideiot.com

© Xiamen WideIoT Technology Co., Ltd. All rights reserved.

No organisation or individual may, without the written permission of the Company, extract or reproduce any part or all of the contents of this document, nor may they disseminate it in any form.

The information contained in this document is subject to change without notice due to product version updates or other reasons.

About WideIoT

Founded in 2011 and headquartered in Xiamen, China, WideIoT is a specialist provider of industrial IoT products and digital solutions, focusing on sectors such as smart factories, smart equipment, energy management, hydrology and water resources, smart water management, and smart cities; The company offers a comprehensive range of products, including industrial wireless routers, industrial switches, industrial smart gateways, industrial data terminals, smart I/O modules, industrial converters, AI edge computers and IoT data cloud platforms. It is a high-tech enterprise integrating R&D, production, sales and service.



Xiamen WideIoT Technology Co., Ltd.

Website: www.wideiot.com

Email: info@wideiot.com

Tel: +86-592-2031080