

# Product Specifications



## WD240

## Industrial IoT Terminal

Digital Input  
Acquisition

Analog Input  
Acquisition

LoRa Networking

Cloud Data  
Transmission

## Product Overview

The WD240 Series Industrial IoT Terminal is a DIN rail-mounted industrial intelligent terminal designed for Modbus I/O data acquisition and LoRa data transmission. It supports LoRa wireless communication, multi-channel I/O data acquisition, Modbus RTU, and wireless RS485 transparent transmission.

The terminal supports multiple configurable I/O combinations, including analog inputs (AI), analog outputs (AO), digital inputs (DI), and digital outputs (DO). Available configurations include 8AI + 4DI + 4RO, 4AI + 8DI + 4RO, 4AI + 4DI + 4DO + 4RO, and 2AO + 6AI + 4DI + 4RO.

The data acquisition function supports reading data from devices using the Modbus RTU protocol via wired RS232/RS485 serial interfaces or wireless LoRa communication with adjustable transmission power. It also supports wireless LoRa-to-serial transparent transmission.

Designed with an industrial-grade architecture, the WD240 Series offers high stability, reliability, and flexible expandability, making it ideal for data acquisition in harsh industrial environments and local wireless communication over distances of up to 12 km (line-of-sight). It is widely used in industries such as mining, oil fields, water conservancy monitoring, smart agriculture, intelligent transportation, smart factories, industrial control, building automation, healthcare, and hospitality.



## Product features

- ✓ **Rich I/O Acquisition Interfaces:** Features 4-channel 12-bit analog inputs (AI), 4-channel digital inputs (DI, supporting dry/wet contacts, 0–60 V input, with counter function), and 4-channel 3 A relay outputs (AC/DC). It also supports multiplexed I/O configuration, allowing up to 8 channels of AI/DI/DO.
- ✓ **Wireless LoRa Transmission:** Integrates a high-power LoRa wireless module with a 30 dBm transmit power and a maximum transmission distance of up to 12 km

(line-of-sight). Supports 410–493 MHz or 850–930 MHz frequency bands, with configurable parameters including channel, transmit power, and data rate.

- ✓ **Standard Modbus RTU Protocol:** Complies with the standard Modbus RTU protocol, enabling efficient local I/O control and data acquisition.
- ✓ **Wireless Transparent Transmission:** Provides wireless transparent transmission for RS232/RS485 interfaces, supporting point-to-point and point-to-multipoint communication. It features interference-free coexistence and optimized data buffering capabilities.
- ✓ **Industrial-Grade Design:** Features a wide voltage input range of 5–35V and a wide operating temperature range of -40 to +85°C. Interfaces are equipped with isolation and 15kV ESD protection, while software and hardware watchdogs enable automatic recovery from abnormal conditions.

## Application scenarios



Smart Factory



Intelligent Equipment



Energy Management



Smart City



Water Conservancy &  
Water Supply



Environmental  
Monitoring



Smart Agriculture



Mining & Oilfield



Building Monitoring



Medical Industry




Hotel & Commercial  
Business




Intelligent  
Transportation

## Typical topology

- Local devices communicate through a LoRa local network, while the gateway enables communication and data exchange with the cloud platform.

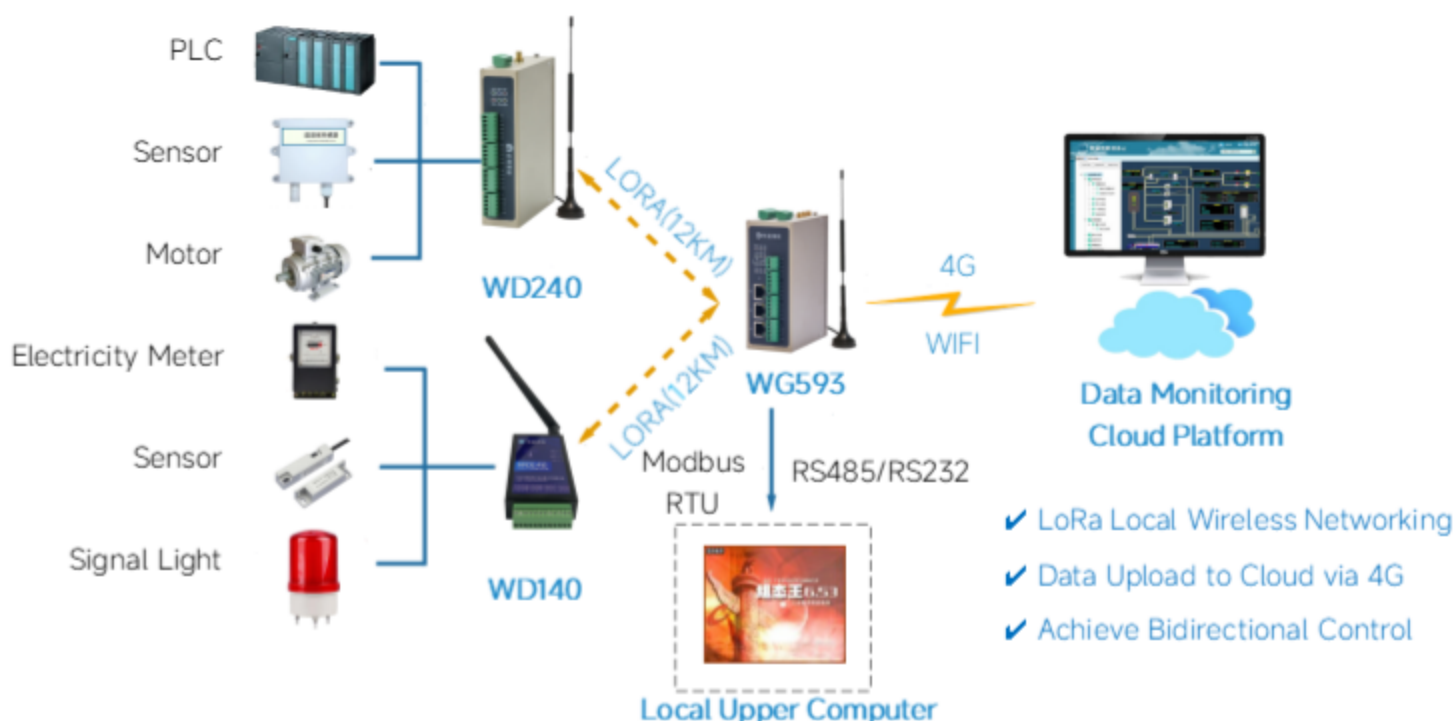

- The host computer communicates with the WD240 (slave device) over a LoRa wireless connection to read and control its I/O and serial port data.

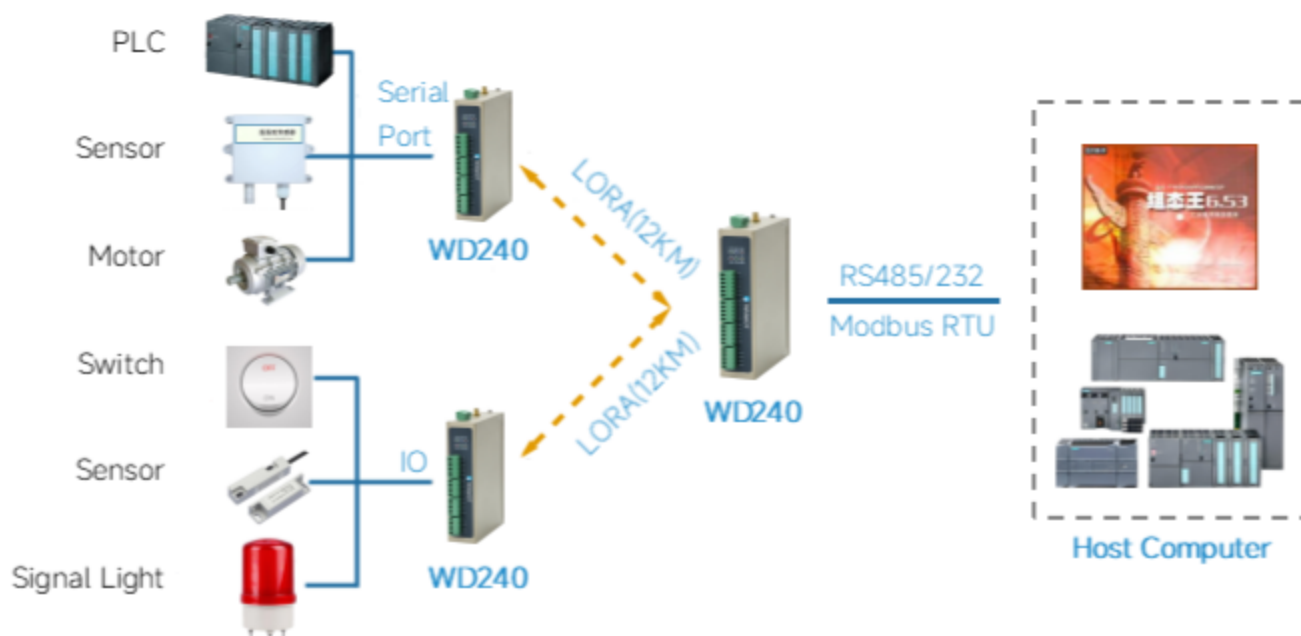

## Product specifications

### Hardware Parameters

#### Hardware platform

|          |                      |
|----------|----------------------|
| CPU Core | 32-bit Arm Cortex-M4 |
|----------|----------------------|

#### Interface specifications

|                   |                                                                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power socket      | DC 9V-35V (terminal block)                                                                                                                                             |
| Serial port       | 1*RS232/RS485 Serial Port, with 15 kV ESD protection, supports baud rates from 1200 to 128000 bit/s, with a default baud rate of 19200 bit/s                           |
| Analog Input      | 4/8-channel 12-bit Analog Inputs (AI) with selectable current or voltage input types. Current Input: 4-20 mA, 0-20 mA Voltage Input: 0-5 V, 0-10 V, etc.               |
| Digital Input     | 4/8-channel optically isolated 0-60 V digital inputs, supporting dry and wet contact inputs (dry contact by default, with support for 4-channel counter functionality) |
| Digital Output    | 4-channel 3 A relay outputs, rated for 250 VAC or 30 VDC, with optional expansion to 4-channel transistor digital outputs (DO)                                         |
| Antenna connector | LORA Antenna:SMA x 1                                                                                                                                                   |
| Terminal Block    | 3*6*3.81mm, 1*3*3.81mm, 1*5*3.81mm                                                                                                                                     |

#### LoRa

|                      |                                                        |
|----------------------|--------------------------------------------------------|
| Frequency Band       | 410-493 MHz or 850-930 MHz (Optional)                  |
| Receiver Sensitivity | 150dBm                                                 |
| Transmit Power       | 22 dBm (Maximum 30 dBm)                                |
| Communication Range  | Up to 12 km (recommended: 2 km indoors, 8 km outdoors) |
| Air Data Rate        | 0.48Kbps-62.5Kbps(Up to 300 kbps)                      |
| Transmit Current     | 650mA                                                  |
| LoRa Channel         | 50 Configurable Channels                               |

#### Mechanical properties

|                     |                          |
|---------------------|--------------------------|
| Dimensions          | 136x106.5x35mm           |
| Installation method | Rail-mounted             |
| Equipment housing   | Metal casing             |
| Protection rating   | IP30                     |
| Heat dissipation    | Fanless heat dissipation |
| Weight              | 280g                     |

**Equipment operating environment**

|                       |                           |
|-----------------------|---------------------------|
| Ambient humidity      | 5% ~ 95% (Non-condensing) |
| Storage temperature   | -40 °C~ 85°C              |
| Operating temperature | -40 °C~ 85°C              |


**EMC Standards**

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Electrostatic discharge immunity                         | GB/T17626.2-2018,level4  |
| Electrical Fast Transient Pulse Immunity                 | GB/T17626.4-2018,level4  |
| Oscillating magnetic field Immunity to interference      | GB/T17626.18-2016,level4 |
| Radio-frequency electromagnetic fields Radiated immunity | GB/T17626.3-2016,level4  |
| Surge (transient) Immunity                               | GB/T17626.5-2019,level4  |
| Power-frequency magnetic field Immunity                  | GB/T17626.8-2006,level4  |

**Physical properties**

|           |                  |
|-----------|------------------|
| Vibration | GB/T2423.10-2008 |
| Impact    | GB/T2423.5-2019  |
| Fall      | GB/T2423.8-1995  |

## Product dimensions

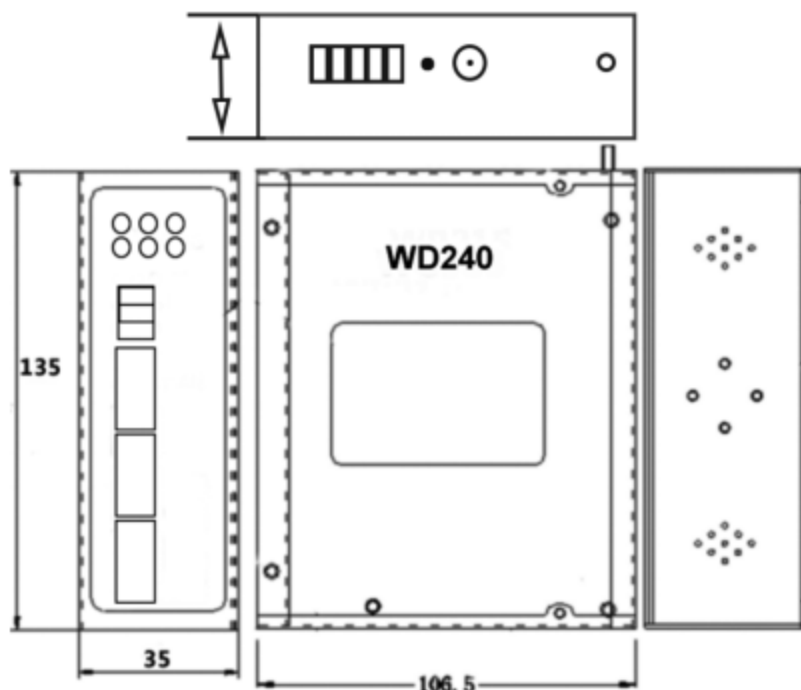

## Order details

### Hardware Selection

|                     |                                                                                                                                                                                                                                                                                                                                              |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Order number        | WD240-<N>-<I>-<S>                                                                                                                                                                                                                                                                                                                            |
| N(Uplink Network)   | L(LORA Module)                                                                                                                                                                                                                                                                                                                               |
| I(I/O Module)       | M0844(M indicates the module configuration, where 0 represents 0 analog outputs (AO), 8 represents 8 analog inputs (AI) (4 dedicated AI + 4 multiplexed AI), 4 represents 4 digital inputs (DI), and 4 represents 4 relay outputs (RO))                                                                                                      |
| S(Serial Port Type) | -232:RS232;-485:RS485                                                                                                                                                                                                                                                                                                                        |
| Example             | WD240-LM0844-485(8AI-4DI-4DO,Frequency Band:410~493MHz,485)<br>WD240-LM0484-232(4DI-4AI-4DI-4RO,Frequency Band:410~493MHz,232)<br>WD240-LM0448-485(4DO-4AI-4DI-4RO,Frequency Band:410~493MHz,485)<br>WD240-LM2644-232(2AO-6AI-4DI-4RO,Frequency Band:410~493MHz,232)<br>WD240-LM0844-485(8AI-4DI-4DO,Frequency Band:850~930MHz,485)<br>..... |

\*This table is for reference only. The exact model selection shall be determined by the engineering team

For further information, please visit the WideIoT website: <https://www.wideiot.com>.

Alternatively, please contact us via the following methods:

Email: [info@wideiot.com](mailto:info@wideiot.com)

---

© Xiamen WideIoT Technology Co., Ltd. All rights reserved.

No organisation or individual may, without the written permission of the Company, extract or reproduce any part or all of the contents of this document, nor may they disseminate it in any form.

The information contained in this document is subject to change without notice due to product version updates or other reasons.

## About WideIoT

Founded in 2011 and headquartered in Xiamen, China, WideIoT is a specialist provider of industrial IoT products and digital solutions, focusing on sectors such as smart factories, smart equipment, energy management, hydrology and water resources, smart water management, and smart cities; The company offers a comprehensive range of products, including industrial wireless routers, industrial switches, industrial smart gateways, industrial data terminals, smart I/O modules, industrial converters, AI edge computers and IoT data cloud platforms. It is a high-tech enterprise integrating R&D, production, sales and service.



**Xiamen WideIoT Technology Co., Ltd.**

Website: [www.wideiot.com](http://www.wideiot.com)

Email: [info@wideiot.com](mailto:info@wideiot.com)

Tel: +86-592-2031080